



M 201

DYNAMIC MICROPHONE

beyerdynamic

FEATURES

- Hypercardioid polar pattern
- Clarity, neutrality and superior intelligibility
- Low-mass moving coil transducer
- Rugged construction
- Integrated hum-buck coil

APPLICATIONS

The M 201's unique construction reduces handling noise to a minimum, giving excellent results as an audience response microphone in TV studios and for location production of vocals and sound effects. Its uniform response and small size make it especially effective for recording and reinforcing snare drums, hi-hats, rack toms and percussion. It also works well with banjos and acoustic guitars.

TECHNICAL SPECIFICATIONS

Transducer type	Dynamic
Operating principle	Pressure gradient
Frequency response	40 - 18,000 Hz
Polar pattern	Hypercardioid
Rear attenuation at 1 kHz	> 20 dB at 120°
Open circuit voltage at 1 kHz (0 dB = 1 V/Pa)	1.2 mV/Pa $\hat{=}$ -58 dBV
Magnetic field suspension	> 18 dB at 50 Hz
Nominal impedance	200 Ω
Load impedance	\geq 1000 Ω
Diaphragm	Hostaphan®
Case/finish	Brass
Connector	3-pin XLR
Dimensions	Length: 160 mm Shaft diameter: 24 mm Head diameter: 24 mm
Weight without cable	220 g

Germany
Theresienstr. 8
74072 Heilbronn
Tel. (07131) 617-0
Fax (07131) 60459
info@beyerdynamic.de
www.beyerdynamic.de



United States
56 Central Ave.
Farmingdale, NY 11735
Tel. (516) 293-3200
Fax (516) 293-3288
salesUSA@beyerdynamic.com
www.beyerdynamic.com

Great Britain
17 Albert Drive
Burgess Hill RH15 9TN
Tel. (01444) 258 258
Fax (01444) 258 444
sales@beyerdynamic.co.uk
www.beyerdynamic.com


France
7, Rue Labie
F-75017 Paris
Tél. 0144.09.93.93
Fax 0144.09.82.33
beyerd_france@compuserve.com
www.beyerdynamic.com

FREQUENCY RESPONSE & POLAR PATTERN

This frequency response curve (measuring tolerance ± 2.5 dB) and polar pattern correspond to a typical production sample for this microphone.

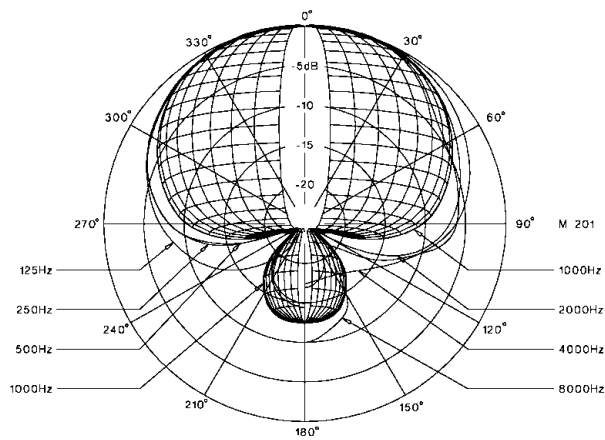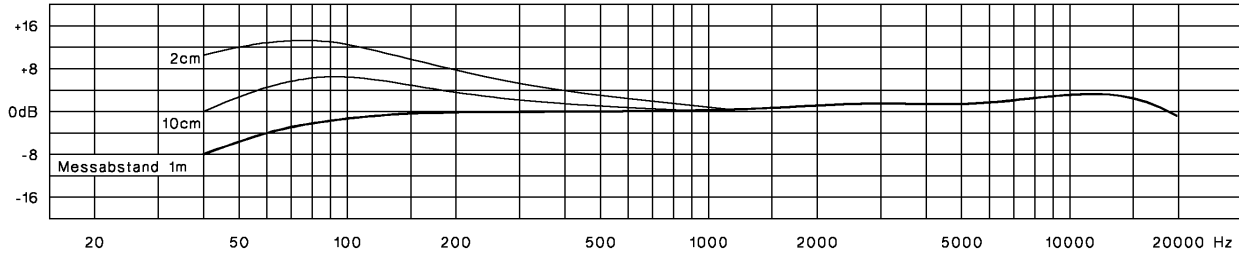

WIRING DIAGRAM

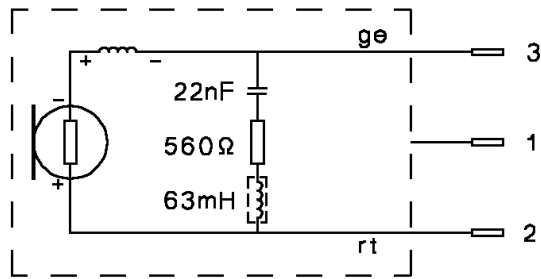

VERSIONS

- M 201 N(C) Dynamic microphone, hypercardioid Order # 100.374
- M 201 TG TourGroup™ version, hypercardioid Order # 406.910

SUPPLIED ACCESSORIES

- Black, padded protective zipper bag
- MKV 8 Microphone clamp with 3/8" internal thread, for shaft diameters of 22 - 32 mm Order # 407.216
- WS 101 Windscreen, charcoal-grey Order # 111.244

OPTIONAL ACCESSORIES

- Highly flexible cables with industry standard jack and/or XLR connectors
- MKV 6 Microphone clamp (clothes peg style clip) for shaft diameters of 19 - 32 mm Order # 407.208
- GST 400 Microphone stand, 3/8", height 0.90 - 1.65 m, with G 400 boom Order # 421.308
- GST 500 Microphone stand, 3/8", height 0.85 - 1.60 m, with telescopic G 500 boom Order # 406.252
- ST 300 Desktop stand 3/8" Order # 432.814