


KP-DRUMS

Drum Microphone KitPak™

- Four custom-engineered cardioid dynamic drum mics
- Road-ready all-metal construction
- Low-profile percussion-style design
- Built-in adjustable stand mount
- KitPak™ includes durable carrying case and bonus drum key



SNARE / TOM

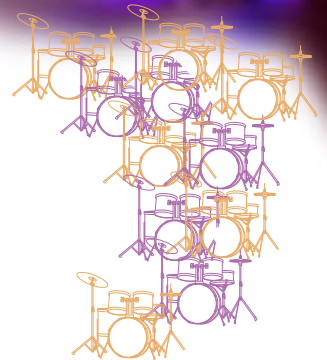

KICK / TOM





KP-DRUMS


Each KP-DRUMS KitPak™ includes:

2 - Snare / Tom Mics

2 - Kick / Tom Mics

Durable Carrying Case

Bonus Drum Key



SNARE/TOM MICROPHONE

CUSTOM-ENGINEERED FOR USE ON SNARE AND TOMS



KICK/TOM MICROPHONE

CUSTOM-ENGINEERED FOR USE ON KICK AND FLOOR TOM




SNARE/TOM SPECIFICATIONS†

Element	Dynamic
Polar Pattern	Cardioid
Frequency Response	100-12,000 Hz
Open Circuit Sensitivity	-58 dB (1.2 mV) re 1V at 1 Pa*
Impedance	500 ohms
Weight	11.4 oz (324 grams)
Dimensions	4.46" (113.2 mm) long, 1.63" (41.5 mm) maximum diameter
Output Connector	Integral 3-pin XLRM-type

KICK/TOM SPECIFICATIONS†

Element	Dynamic
Polar Pattern	Cardioid
Frequency Response	60-12,000 Hz
Open Circuit Sensitivity	-59 dB (1.1 mV) re 1V at 1 Pa*
Impedance	500 ohms
Weight	11.2 oz (317 grams)
Dimensions	4.59" (116.5 mm) long, 2.11" (53.5 mm) maximum diameter
Output Connector	Integral 3-pin XLRM-type

† In the interest of standards development, A.T.U.S. offers full details on its test methods to other industry professionals on request.
* 1 Pascal=10 dynes/cm²=10 microbars=94 dB SPL



audio-technica®

Audio-Technica U.S., Inc., 1221 Commerce Drive, Stow, Ohio 44224
330/686-2600 Fax: 330/686-0719 E-mail: pro@atus.com www.audio-technica.com

Audio-Technica Limited, Old Lane, Leeds LS11 8AG England
(0)113 277 1441 Fax: (0)113 270 4836 E-mail: sales@audio-technica.co.uk

Form No. 0324-0600-00 ©1999 Audio-Technica U.S., Inc. Printed in U.S.A.